

SPACING TABLE 1 HOUR EMERGENCY DURATION  
**SERIE 400 HOR**




Luminous flux: 800 lm

Emergency lighting factor: 0.70

Emergency luminous flux: 560 lm



HBI Bisscheroux B.V. 4L09--HOR 400 HOR/ LVK (polair)

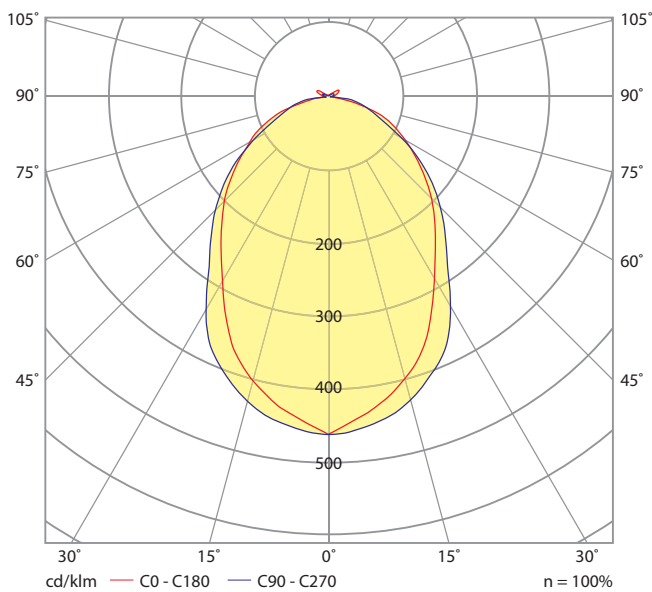

1 lux - 1 hour duration

Mounting height (meters)					
2.50	4.6	11.1	11.4	11.7	4.8
3.00	5.1	12.2	12.5	12.7	5.1
3.50	5.4	13.2	13.3	13.5	5.4
4.00	5.7	14.0	14.1	14.2	5.7
4.50	6.0	14.8	14.8	14.8	5.9
5.00	6.2	15.4	15.4	15.4	6.0
6.00	6.5	16.6	16.5	16.3	6.3
7.00	6.6	17.4	17.2	17.0	6.3
8.00	6.6	18.1	17.8	17.5	6.3
9.00	6.6	18.5	18.2	17.8	6.2
10.00	6.5	18.7	18.4	18.0	6.0
11.00	6.4	18.8	18.4	17.9	5.7
12.00	6.1	18.8	18.3	17.7	5.4
13.00	5.6	18.6	18.0	17.4	4.9
14.00	4.8	18.4	17.7	17.0	4.1
15.00	3.6	18.2	17.4	16.5	2.8
16.00	0.9	17.9	16.9	16.0	0.3