

SPACING TABLE 3 HOURS EMERGENCY DURATION SERIE 400 HOR




Luminous flux: 800 lm

Emergency lighting factor: 0.23

Emergency luminous flux: 187 lm



HBI Bisscheroux B.V. 4L09--HOR 400 HOR/ LVK (polair)

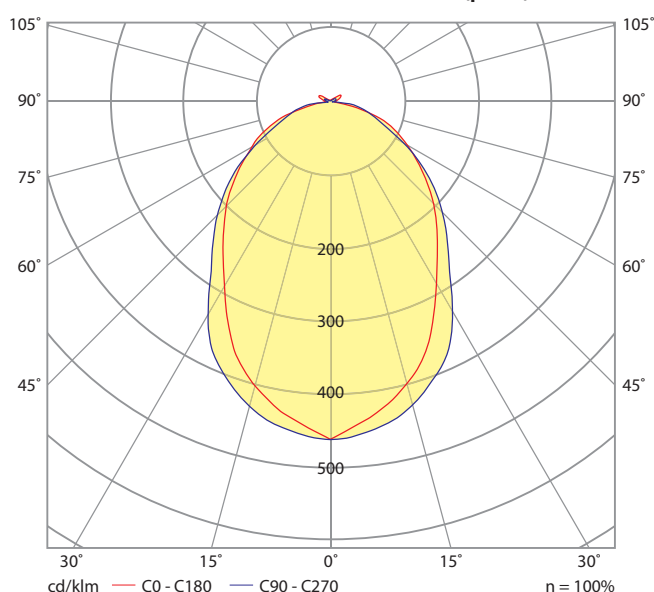

1 lux - 3 hours duration

Mounting height (meters)					
2.50	3.4	8.4	8.4	8.5	3.4
3.00	3.6	9.1	9.0	9.0	3.5
3.50	3.7	9.6	9.5	9.5	3.6
4.00	3.8	10.1	9.9	9.8	3.7
4.50	3.8	10.4	10.2	10.1	3.7
5.00	3.8	10.6	10.4	10.3	3.6
6.00	3.7	10.9	10.6	10.4	3.4
7.00	3.5	10.8	10.5	10.2	3.1
8.00	2.8	10.7	10.3	9.9	2.4
9.00	1.4	10.4	9.9	9.4	0.9