

SPACING TABLE 1 HOUR EMERGENCY DURATION

SERIE 300 EAGLE

Fresnel (F)




Luminous flux: 585 lm

Emergency lighting factor: 0.79

Emergency luminous flux: 460 lm



HBI Bisscheroux B.V. 3L06--F-- 300 Eagle / LVK (polair)

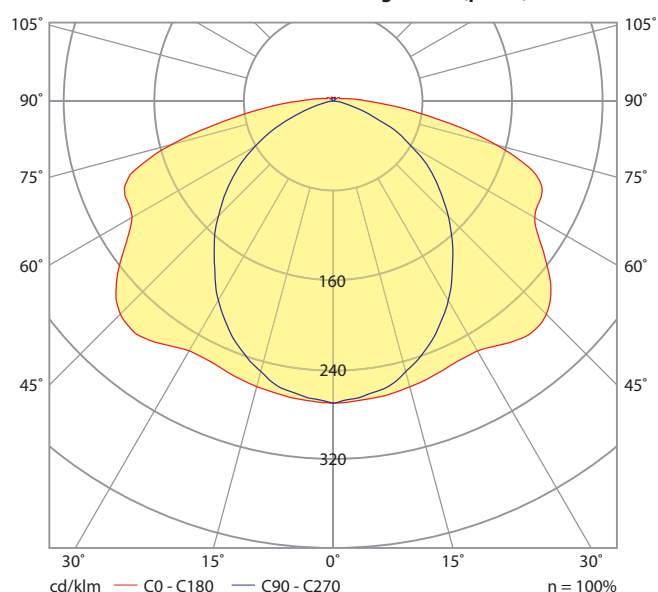

1 lux - 1 hour duration					
Mounting height (meters)					
2.50	5.6	14.3	11.8	9.6	4.0
3.00	5.8	15.2	12.7	10.5	4.3
3.50	6.0	15.9	13.4	11.2	4.5
4.00	6.2	16.4	13.9	11.9	4.7
4.50	6.4	16.7	14.4	12.4	4.8
5.00	6.5	17.0	14.8	12.8	4.9
6.00	6.7	17.8	15.5	13.4	4.9
7.00	6.5	18.4	16.1	13.8	4.8
8.00	5.9	18.8	16.3	13.9	4.5
9.00	4.8	18.8	16.2	13.8	3.9
10.00	3.6	18.4	15.6	13.4	3.0
11.00	1.3	17.3	14.4	12.9	1.0