

SPACING TABLE 1 HOUR EMERGENCY DURATION

SERIE 200 POLAREM

Ceiling Square (CS)




Luminous flux: 550 lm

Emergency lighting factor: 0.64

Emergency luminous flux: 352 lm



HBI Bisscheroux B.V. 2L05--CS--- Polarem CS / LVK (polair)

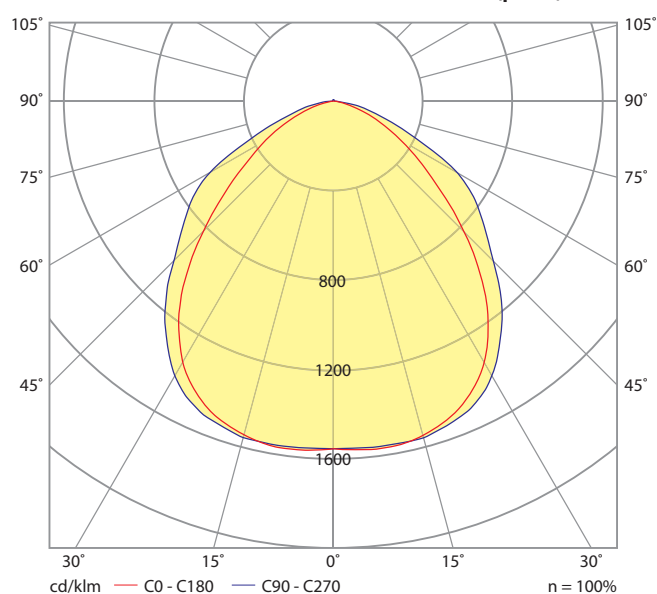

1 lux - 1 hour duration

Mounting height (meters)					
2.50	4.5	10.5	9.8	9.1	3.8
3.00	4.8	11.6	10.8	9.9	4.1
3.50	5.1	12.6	11.6	10.7	4.4
4.00	5.3	13.3	12.4	11.3	4.7
4.50	5.4	13.9	12.9	11.9	4.9
5.00	5.5	14.4	13.4	12.5	5.0
6.00	5.7	15.1	14.2	13.5	5.3
7.00	5.7	15.6	14.8	14.2	5.4
8.00	5.5	15.9	15.3	14.8	5.3
9.00	5.2	16.1	15.6	15.1	5.0
10.00	4.5	16.1	15.7	15.2	4.3
11.00	3.2	15.8	15.4	15.1	3.1