

SPACING TABLE 1 HOUR EMERGENCY DURATION

SERIE 550 AIO




Luminous flux: 580 lm

Emergency lighting factor: 0.78

Emergency luminous flux: 450 lm



HBI Bisscheroux B.V. 5AL06-- 550 AiO / LVK (polair)

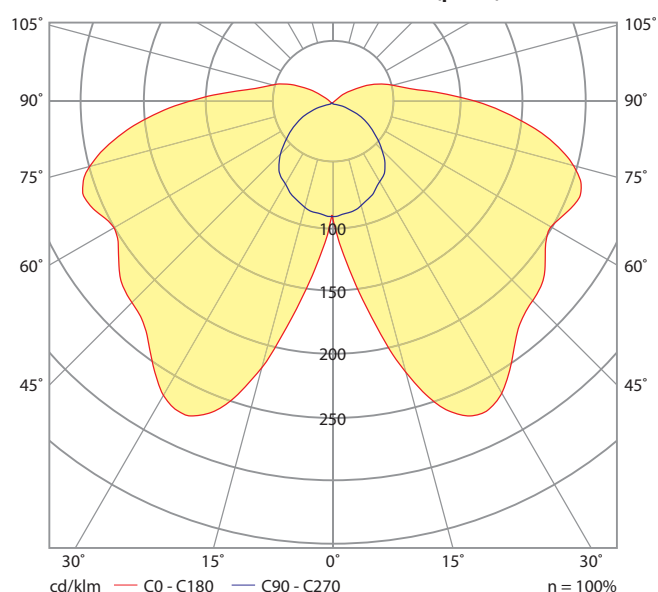

1 lux - 1 hour duration

Mounting height (meters)					
2.50	5.6	14.8	10.9	7.4	2.9
3.00	5.7	15.4	11.4	7.9	3.0
3.50	5.8	15.9	11.8	8.3	3.1
4.00	6.0	16.2	12.1	8.5	3.0
4.50	6.1	16.4	12.3	8.7	2.8
5.00	6.1	16.6	12.5	8.7	2.5
6.00	6.0	17.0	12.6	8.2	1.4